


**MULTIPLE OF LONG-TIME PICKUP**

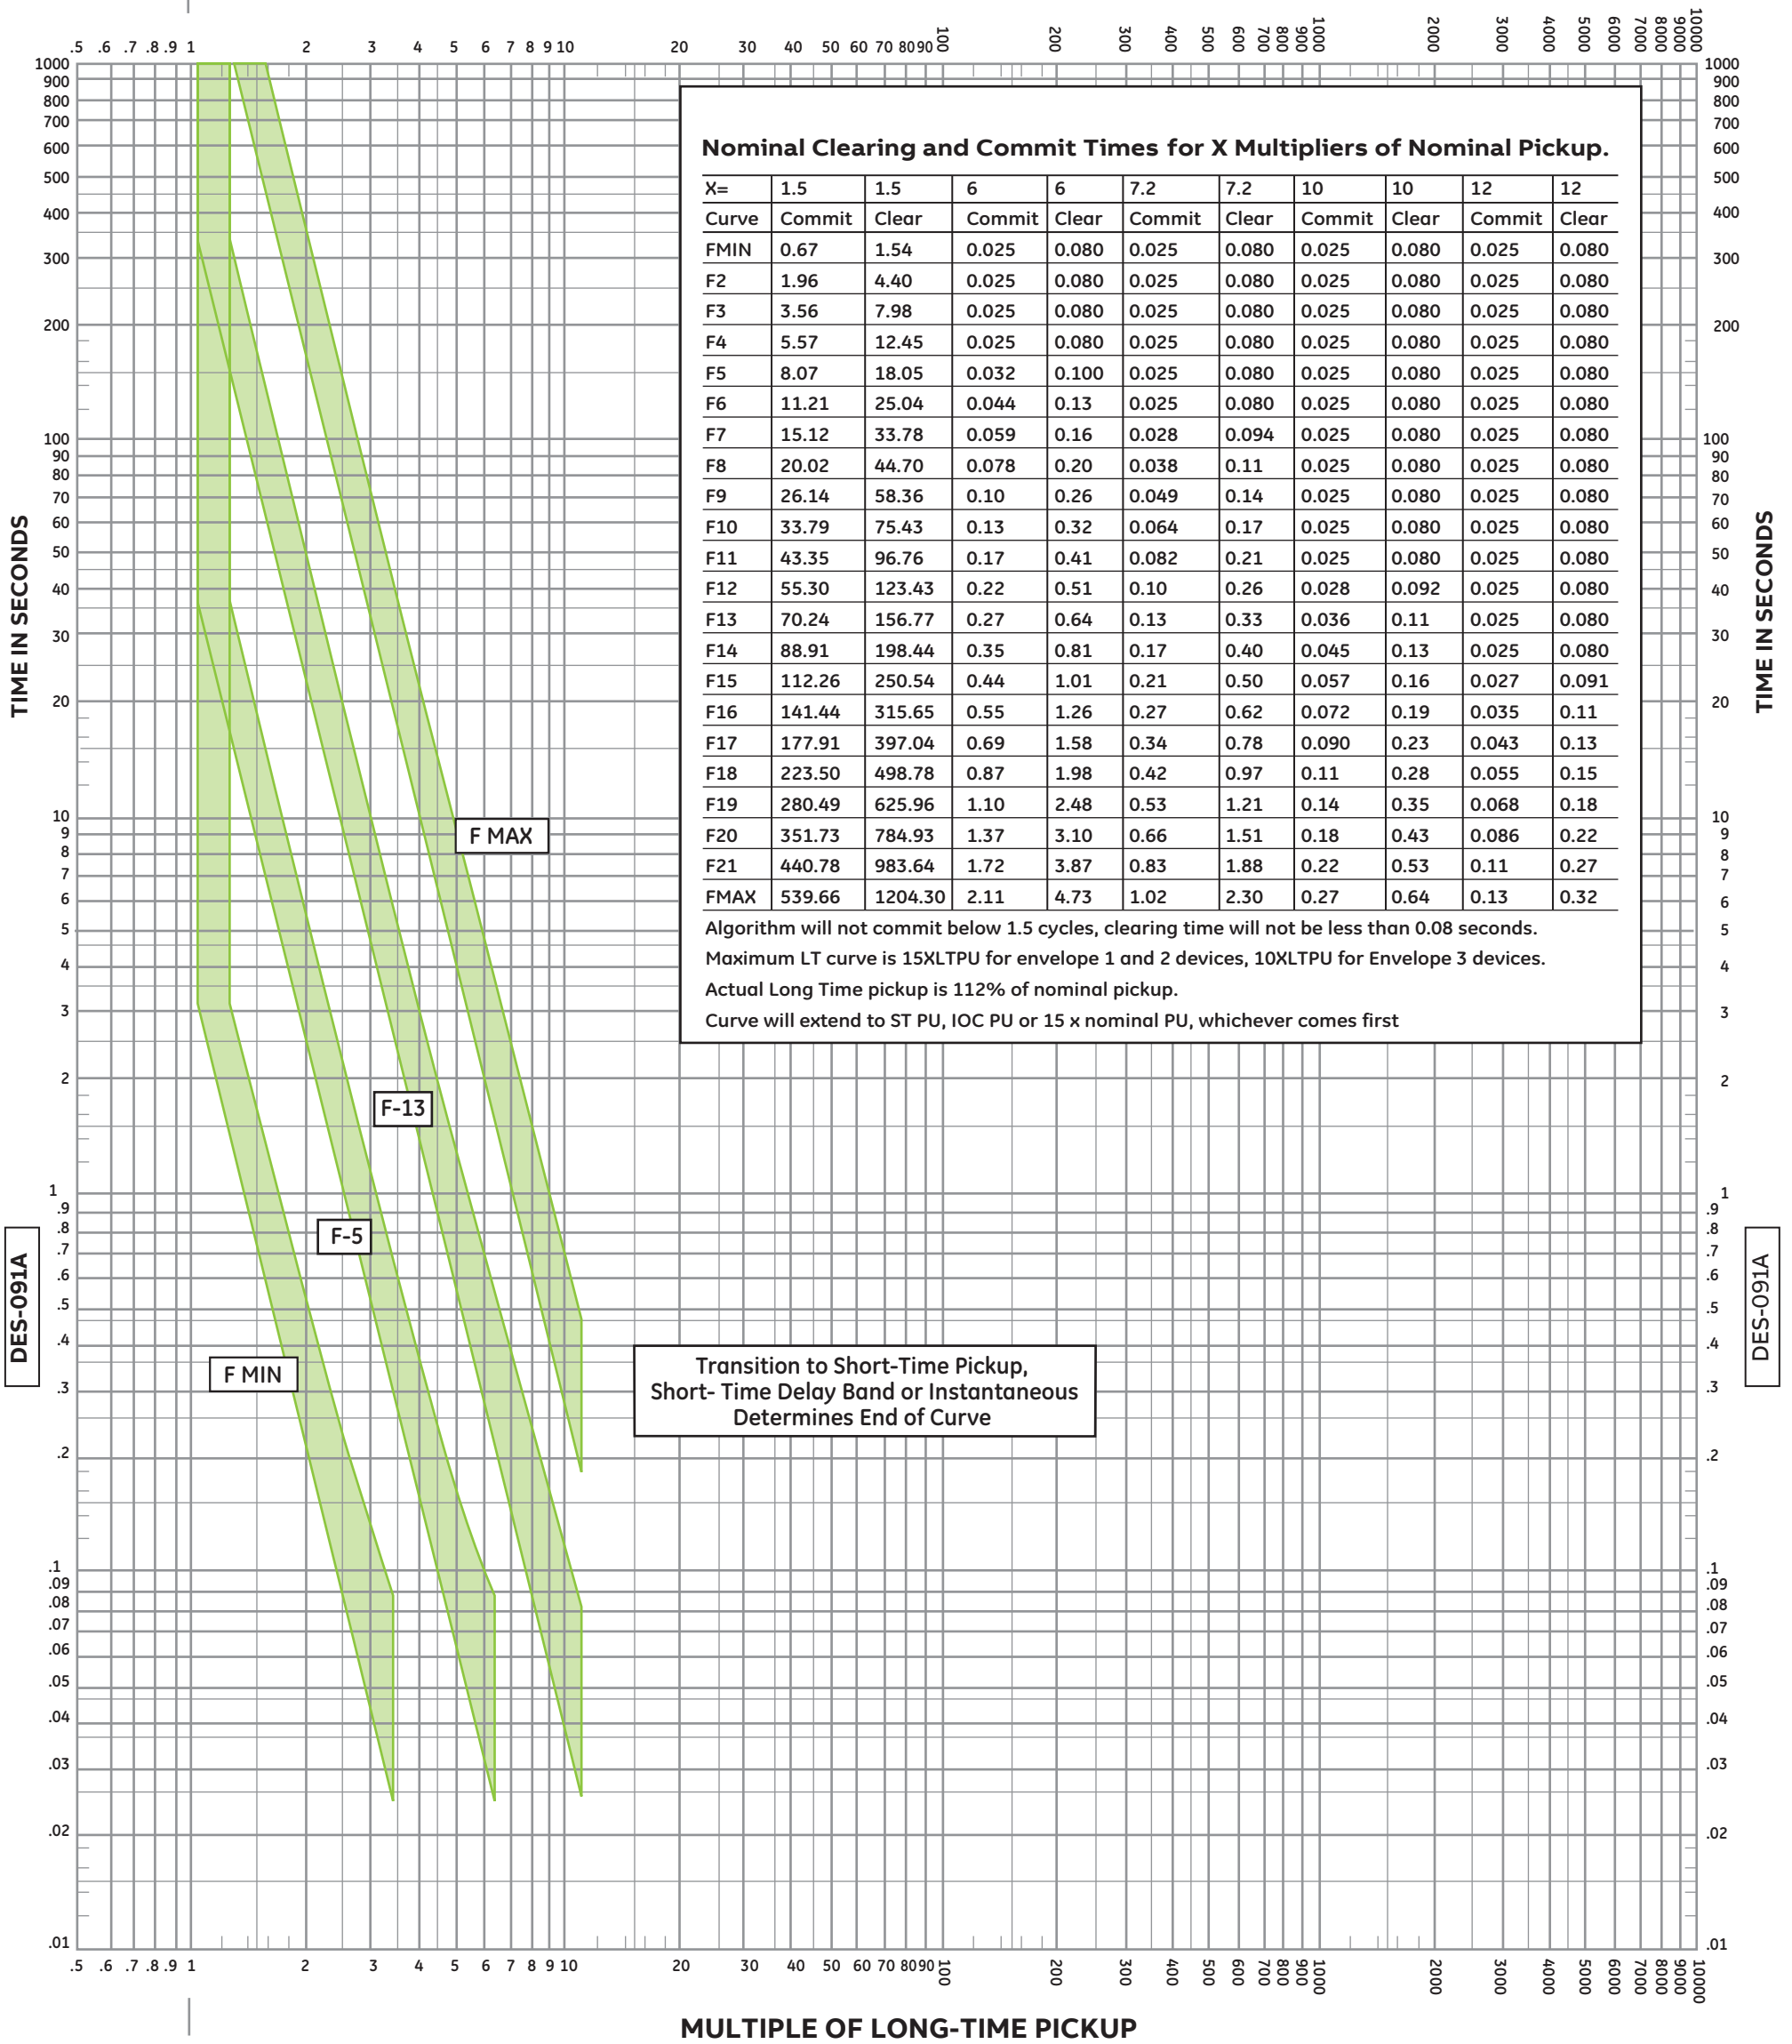

Frames	800-5000A	UL1066
Frames	800-6000A	UL489
Sensors	400-6000A	

All Voltages: 600 Vac and below

**Low-Voltage Circuit Breakers**

EntelliGUard TU Trip Unit for EntelliGuard G and R (Retrofill) Circuit Breakers

UL489 and UL1066 Stored Energy Mechanism Circuit Breakers

**Long-Time Fuse-Like Characteristics**

Curves apply at 60 Hertz and from -20°C to 55°C circuit breaker ambient temperature.

**DES-091A**

Long-Time Pickup Range  
0.5X-1.0X Trip Rating Plug